



# DM SERIES

Outdoor Transparent Screen



Office Building



Shopping Mall



Airport

## Product Specifications


Specifications	DM-390780	DM-520100	DM-100	DM-150
Pixel Pitch (mm)	H:3.9 / V:7.8	H:5.2 / V:10.4	H:10.4 / V:10.4	H:15.6 / V:15.6
LED Type	SMD1921		SMD2727	
Application	Outdoor			
Module Size (mm)	500x250			
Module Resolution (pixel)	128x32	96x24	48x24	32x16
Cabinet Size (mm)	1000x500			
Cabinet Resolution (pixel)	256x64	192x48	96x48	64x32
Transparency Rate	53%	58%		71%
Brightness (cd/m <sup>2</sup> )	7000 - 10000			
Refresh Rate (Hz)	≥3840Hz			
Contrast Ratio	5000:1			
Gray Scale (Bit)	14			
Power Consumption (W/m <sup>2</sup> ) Max./Avg.	800 / 260			
Viewing Angle (H/V)	140° / 140°			
Life Span (Hr)	≥100,000			
IP Rate (Front/Back)	IP65 / IP65			
Maintenance Type	Front / Back			
Cabinet Material	Die Casting Aluminum			
Cabinet Weight (Kg)	7.5			
Curve	Optional			
Installation	Hanging / Stacking / Fixed			

## Key Features


### Die-Casting Aluminum Cabinet, Strong & High Precision, Seamless Assembly



### Slim & Light for Space & Structure Cost Saving

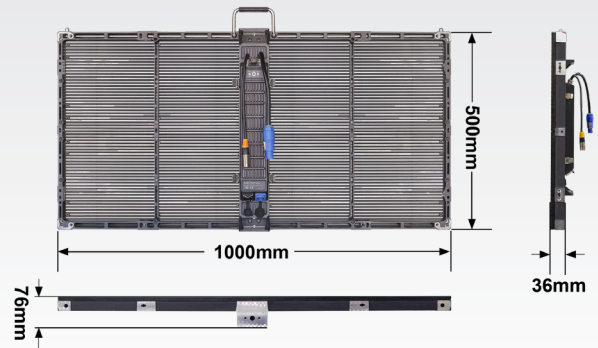


### High Transparency Rate, Up to 71%

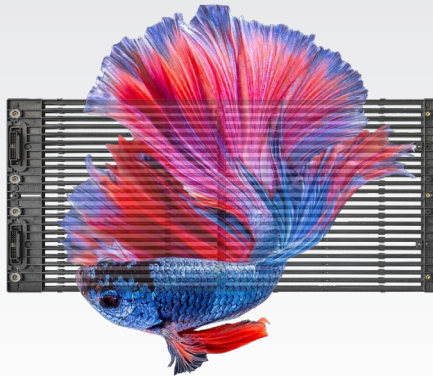

### Fully Protection with IP65



### Fast & Easy for Front/Back Maintenance

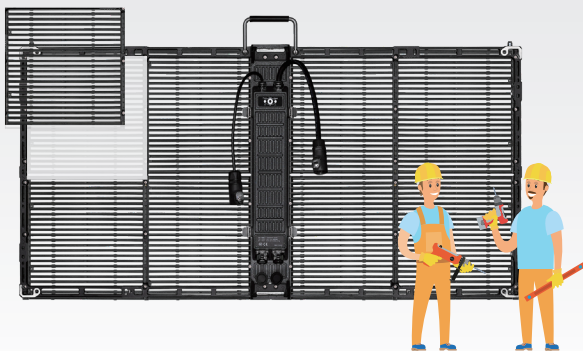

### Versatile Installation

