



# PS SERIES

Ecological | Commercial | LED display



Hotel



Shopping Mall



Office Building



Subway Station



Restaurant

## Product Specifications


Specifications	PS-181	PS-251
Pixel Pitch (mm)	1.86	2.5
LED Type	SMD1515	SMD2020
Application	Indoor	
Module Size (mm)	320x160	
Module Resolution (pixel)	172x86	128x64
Display Size (mm)	640x1920	
Frame Size (mm)	656x1936	
Display Resolution (pixel)	344x1032	256x768
Brightness (cd/m <sup>2</sup> )	600	
Refresh Rate (Hz)	3840	
Contrast Ratio	5000 : 1	
Gray Scale (Bit)	14	
Power Consumption (W/m <sup>2</sup> ) Max./Avg.	465 / 155	425 / 140
Viewing Angle (H/V)	160° / 140°	
Life Span (Hr)	≥100,000	
IP Rate (Front/Back)	IP30 / IP30	
Maintenance Type	Front / Back	
Display Material	Sheet metal + profiles	
Display Weight (Kg)	47kg / set	
Installation Method	Floor-mounted / Hoisting / Wall mounting / 6 splicing units	

### Cluster Management and Control


- Auditing and playback control can be managed remotely and centrally



### Intelligent Cloud playback Architecture

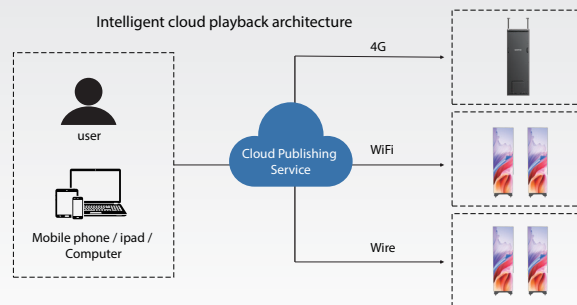

### 7 Highlights

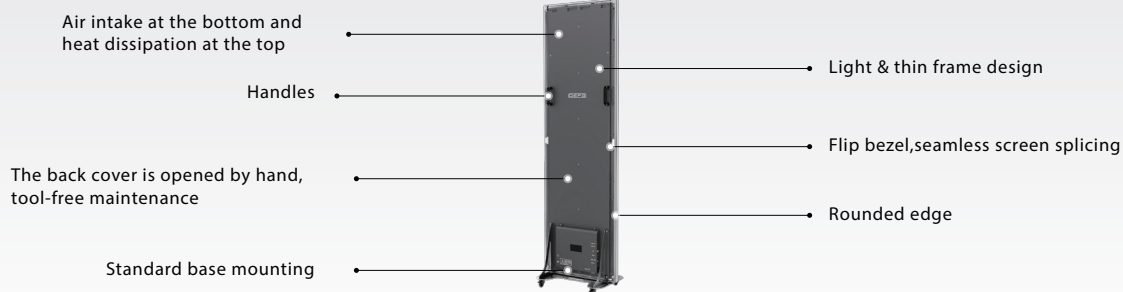

### Flexible Installation

- Free installation, standard floor mounted poster screen, buy it and use it
- 1-6 unites arbitrary splicing, to be bigger size easily
- More optional installation way: hoisting & wall mounted

