




PS+ Series

Smart Poster LED Display



Hotel



Shopping Mall



Exhibition Hall



Subway Station



Event


Product Specifications

Specifications	PS+151 83"	PS+181 83"	PS+251 83"
Pixel Pitch (mm)	1.56	1.87	2.5
LED Type	SMD1212	SMD1515	SMD2020
Application	Indoor		
Module Size (mm)	300×168.75		300×337.5
Module Resolution (pixel)	192×108	160×90	120×135
Display Size (mm)	600×2025		
Display Resolution (pixel)	384×1296	320×1080	240×810
Pixel Density (pixel/m ²)	409,600	284,444	160,000
Brightness (cd/m ²)	450-600		
Refresh Rate (Hz)	3840		
Contrast Ratio	5000:1		
Grey scale (Bit)	14		
Power Consumption (W/m ²) Max. / Avg.	420 / 140		
Viewing Angle (H/V)	160°/ 160°		
Life Span (Hr)	≥100,000		
IP Rate (Front/Back)	IP45 / IP30		
Maintenance Type	Front / Back		
Display Material	Die-Cast Aluminum		
Display Weight (Kg)	31		
Installation	Standing / Hanging / Wall-Mounted		

Key Features

Smart Ecosystem

- Unified management platform with quad-input control (HDMI / USB / 4G / Cloud), powered by Android 11 OS
- All-in-one intelligent system — plug and play, requires no installation or debugging

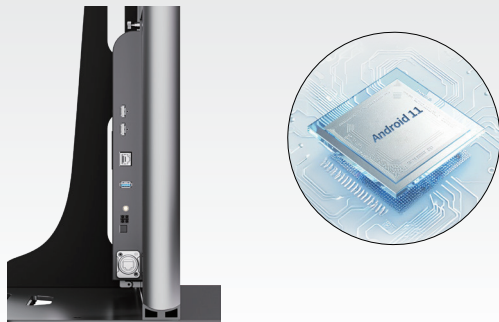

Industrial-Grade Durability

- High-quality components maintain less than 5% annual brightness degradation
- GOB surface with die-cast aluminum cabinet and rounded-corner design ensures robust structural strength



Visual Excellence

- 16-bit grayscale and a 5,000:1 contrast ratio deliver lifelike image detail and depth
- Unique edge design enables truly seamless splicing for immersive visuals



Multi-Screen Collaboration

- Aviation-grade connectors enable limitless seamless configurations, reducing installation and labor costs
- Six PS+181 (83") screens can be combined to achieve full 2K resolution



Maximize Impact & Space

- The retail interaction engine and cloud-managed content zones enhance engagement and conversion through real-time updates
- The 39 mm ultra-slim design optimizes advertising space for maximum visibility across all environments

